




## METAL OXIDE VARISTOR

### DIMENSION OF COMPONENT

**Dimension Table** measure :m/m

Dia Code	5 $\phi$	7 $\phi$	10 $\phi$	14 $\phi$	20 $\phi$
<b>D max.</b>	7.5	9.0	13.5	17.0	23.0
<b>d(+0.02)</b>	0.6	0.6	0.8	0.8	1.0
<b>F(+1.0)</b>	5.0	5.0	7.5	7.5	10.0
<b>H max.</b>	11.0	12.0	15.5	20.5	28.0
<b>L min.</b>	25.0	25.0	25.0	25.0	25.0

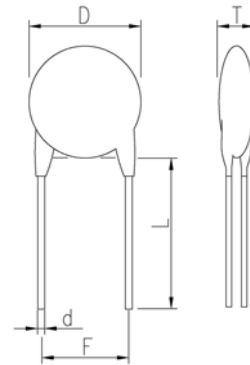

#### OPTION :

\*P type lead wire is the standard products. If you have other requirement, please contact us.

**T max. Table**

Dia Voltage	5 $\phi$	7 $\phi$	10 $\phi$	14 $\phi$	20 $\phi$
<b>180K</b>	4.0	4.0	4.0	4.0	
<b>220K</b>	5.0	5.0	5.0	5.0	
<b>270K</b>	5.0	5.0	5.0	5.0	
<b>330K</b>	5.0	5.0	5.0	5.0	
<b>390K</b>	5.0	5.0	5.0	5.0	
<b>470K</b>	5.0	5.0	5.0	5.0	
<b>560K</b>	5.0	5.0	5.0	5.0	
<b>680K</b>	5.0	5.0	5.0	5.0	
<b>820K</b>	5.0	5.0	5.0	5.0	5.0
<b>101K</b>	5.0	5.0	5.0	5.0	5.0
<b>121K</b>	5.0	5.0	5.0	5.0	5.0
<b>151K</b>	5.0	5.0	5.0	5.0	5.0
<b>181K</b>	5.0	5.0	5.0	5.0	5.0
<b>201K</b>	5.0	5.0	5.0	5.0	5.0
<b>221K</b>	5.0	5.0	5.0	5.0	5.0
<b>241K</b>	5.0	5.0	5.0	5.0	5.0

Dia Voltage	5 $\phi$	7 $\phi$	10 $\phi$	14 $\phi$	20 $\phi$
<b>271K</b>	5.0	5.0	5.0	5.0	5.0
<b>301K</b>	6.0	6.0	6.0	6.0	6.0
<b>331K</b>	6.0	6.0	6.0	6.0	6.0
<b>361K</b>	6.0	6.0	6.0	6.0	6.0
<b>391K</b>	6.0	6.0	6.0	6.0	6.0
<b>431K</b>	6.0	6.0	6.0	6.0	6.0
<b>471K</b>	6.0	6.0	6.0	6.0	6.0
<b>511K</b>			6.0	6.0	6.0
<b>561K</b>			6.0	6.0	6.0
<b>621K</b>			6.0	6.0	6.0
<b>681K</b>			7.0	7.0	7.0
<b>751K</b>			7.0	7.0	7.0
<b>781K</b>			7.0	7.0	7.0
<b>821K</b>			7.0	7.0	7.0
<b>911K</b>			7.0	7.0	7.0
<b>102K</b>			8.0	8.0	8.0
<b>112K</b>			8.0	8.0	8.0
<b>182K</b>			10.0	10.0	10.0